



**enRAY**<sup>®</sup>  
NEXT WAVE OF INNOVATION

Lighting  
**Catalogue**  
2024

Residential | Commercial | Industrial | Architectural

# About Us

With over **14+ years** of experience in lighting industry, we specialise in designing and creating lighting products that fit your unique needs.

## Vision:

Energising a Sustainable world



## Mission:

Our mission is to empower sustainable living with energy-efficient lighting, helping clients save energy, reduce costs, and protect the environment.


## Fushion Plus



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model     | Wattage | Rim Color                 |
|-----------|---------|---------------------------|
| EN-FP-7W  | 7W      | Rose Gold/<br>Shiny Black |
| EN-FP-12W | 12W     |                           |


## Harmony

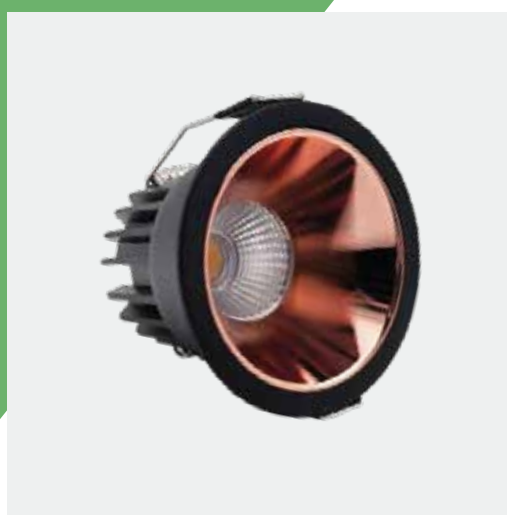

| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |


| Model     | Wattage | Rim Color       |
|-----------|---------|-----------------|
| EN-HR-7W  | 7W      | Black           |
| EN-HR-12W | 12W     | Rose Gold       |
| EN-HR-15W | 15W     | Titanium/Silver |
| EN-HR-18W | 18W     | White/Gold      |

## Beat COB

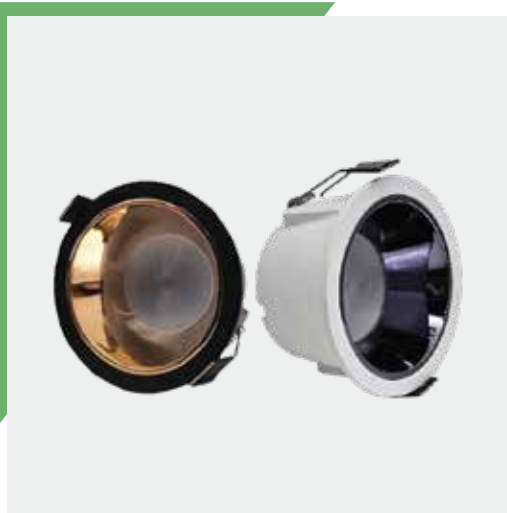


| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |


| Model     | Wattage | Rim Color |
|-----------|---------|-----------|
| EN-BT-7W  | 7W      | Rose Gold |
| EN-BT-12W | 12W     |           |
| EN-BT-18W | 18W     | Black     |
| EN-BT-24W | 24W     |           |



Warm White



Neutral White




Cool White

Body Color:

Black | White

**Indoor Lighting**

## Shine



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model     | Wattage | Rim Color      |
|-----------|---------|----------------|
| EN-SH-7W  | 7W      | Black          |
| EN-SH-12W | 12W     | Rose Gold      |
| EN-SH-18W | 18W     | White/Titanium |

## Galaxy



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |


| Model       | Wattage | Rim Color |
|-------------|---------|-----------|
| EN-GLX-7W   | 7W      | White     |
| EN-GLX-12W  | 12W     |           |
| EN-GLXP-7W  | 7W      | Black     |
| EN-GLXP-12W | 12W     |           |

## Aqua Cylinder



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model     | Wattage | Rim Color |
|-----------|---------|-----------|
| EN-AQ-7W  | 7W      | Rose Gold |
| EN-AQ-12W | 12W     | Black     |
| EN-AQ-18W | 18W     | White     |
| EN-AQ-30W | 30W     | Gold      |

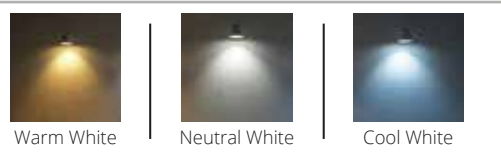

Body Color:

Black | White

**Indoor Lighting**

## Wonder



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model      | Wattage | Rim Color |
|------------|---------|-----------|
| EN-WND-3W  | 3W      | White     |
| EN-WND-7W  | 7W      |           |
| EN-WND-12W | 12W     |           |
| EN-WND-18W | 18W     |           |
| EN-WND-24W | 24W     |           |
| EN-WND-30W | 30W     |           |
| EN-WND-40W | 40W     |           |
| EN-WND-50W | 50W     |           |

## Aqua Plus Cylinder



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model      | Wattage | Rim Color |
|------------|---------|-----------|
| EN-AQP-7W  | 7W      | Black     |
| EN-AQP-12W | 12W     |           |
| EN-AQP-18W | 18W     |           |
| EN-AQP-30W | 30W     |           |

|  |   |   |             |       |
|--|---|---|-------------|-------|
|  |  |  | Body Color: |       |
| Warm White   | Neutral White   | Cool White  | Black       | White |

## Pullout



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model     | Wattage | Rim Color   |
|-----------|---------|-------------|
| EN-PO-12W | 12W     | White/Black |
| EN-PO-18W | 18W     |             |

## Button- Spot



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |


| Model     | Wattage | Rim Color              |
|-----------|---------|------------------------|
| EN-BTS-3W | 3W      | Black/Rose gold/ White |

## Alto




| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |


| Model      | Wattage | Rim Color                  |
|------------|---------|----------------------------|
| EN-ALT-7W  | 7W      | White with Black Reflector |
| EN-ALT-12W | 12W     |                            |



Warm White



Neutral White



Cool White

Body Color:

Black

White

**Indoor Lighting**


## Star Track-SM



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model       | Wattage | Rim Color   |
|-------------|---------|-------------|
| EN-STSM-12W | 12W     | Black/White |
| EN-STSM-20W | 20W     |             |
| EN-STSM-30W | 30W     |             |
| EN-STSM-40W | 40W     |             |

## Passion Linea Lazer

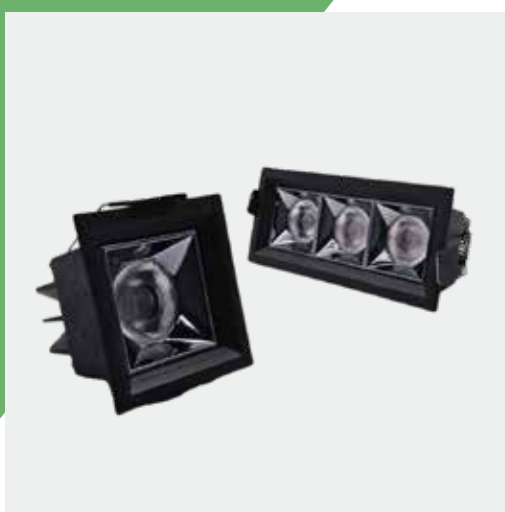

| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model      | Wattage | Rim Color   |
|------------|---------|-------------|
| EN-PLL-4W  | 4W      | Black/White |
| EN-PLL-12W | 12W     |             |
| EN-PLL-16W | 16W     |             |
| EN-PLL-20W | 20W     |             |
| EN-PLL-36W | 36W     |             |

## Spark Linea Lazer



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model      | Wattage | Rim Color   |
|------------|---------|-------------|
| EN-SLL-4W  | 4W      | Black/White |
| EN-SLL-6W  | 6W      |             |
| EN-SLL-12W | 12W     |             |
| EN-SLL-24W | 24W     |             |

|  |   |   |             |       |
|--|---|---|-------------|-------|
|  |  |  | Body Color: |       |
| Warm White   | Neutral White   | Cool White  | Black       | White |

## Rocket



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model      | Wattage | Rim Color   |
|------------|---------|-------------|
| EN-RCK-12W | 12W     | Black/White |


## Titan



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model     | Wattage | Rim Color   |
|-----------|---------|-------------|
| EN-TN-7W  | 7W      | White/Black |
| EN-TN-12W | 12W     |             |
| EN-TN-18W | 18W     |             |

## Titan Plus

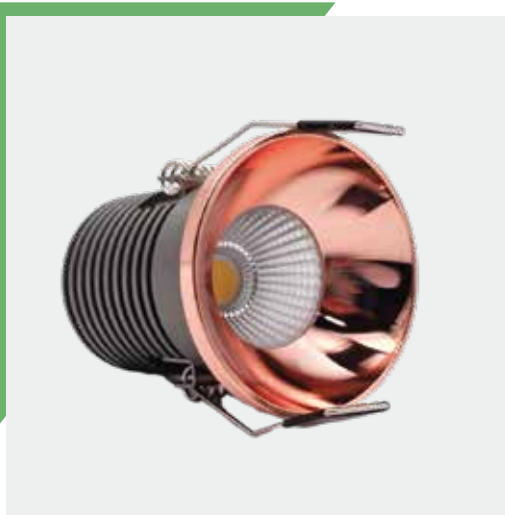


| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model      | Wattage | Rim Color         |
|------------|---------|-------------------|
| EN-TNP-7W  | 7W      | Satin Black/White |
| EN-TNP-12W | 12W     |                   |
| EN-TNP-18W | 18W     |                   |

|  |   |   |             |       |
|--|---|---|-------------|-------|
|  |  |  | Body Color: |       |
| Warm White   | Neutral White   | Cool White  | Black       | White |


## Rio

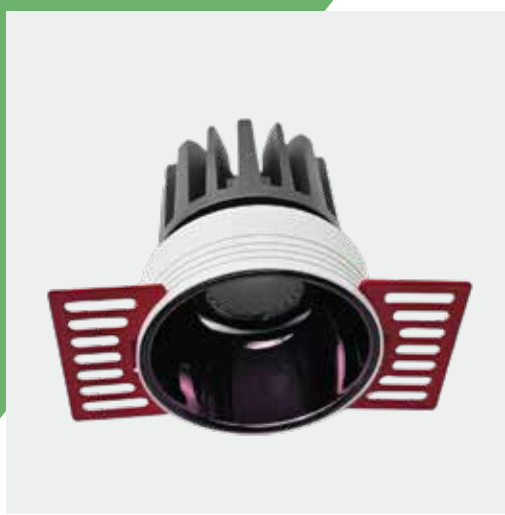

| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model       | Wattage | Rim Color   |
|-------------|---------|-------------|
| EN-RIO-12CL | 12CL    | White/Black |
| EN-RIO-12TL | 12TL    |             |
| EN-RIO-2CL  | 12W*2   |             |

## Platinum Wall Spot

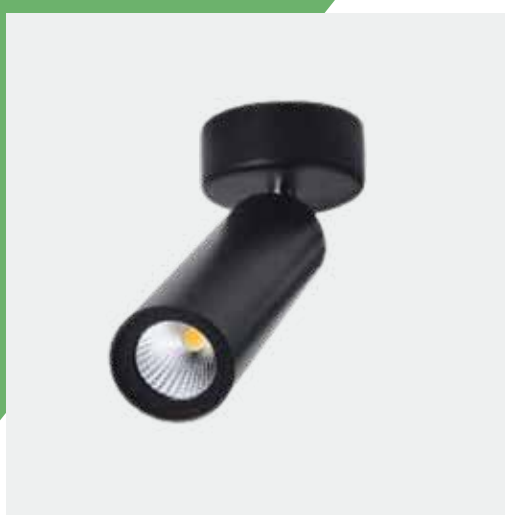

| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model       | Wattage | Rim Color  |
|-------------|---------|------------|
| EN-PLWS-12W | 12W     | Gold/Black |

## Apple



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | (80-120Lm/W) *         | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model      | Wattage | Rim Color |
|------------|---------|-----------|
| EN-APL-7W  | 7W      | Gold      |
| EN-APL-12W | 12W     |           |
| EN-APL-18W | 18W     |           |

|  |   |   |             |       |
|--|---|---|-------------|-------|
|  |  |  | Body Color: |       |
| Warm White   | Neutral White   | Cool White  | Black       | White |

## Led Panel (Pc Body)



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | 120 (lm/W)             | Up-to 2.5kV      | 0.95         | >80 | <10 |

| Model   | Wattage |
|---------|---------|
| EN-PCPL | 8W      |
|         | 15W     |
|         | 18W     |
|         | 24W     |

## Led Downlight Panel (Alluminum body)



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | 120 (lm/W)             | Up-to 2.5kV      | 0.95         | >80 | <10 |


| Model   | Wattage |
|---------|---------|
| EN-ALDL | 8W      |
|         | 15W     |
|         | 18W     |

## Led Deep Downlight Panel



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | 120 (lm/W)             | Up-to 2.5kV      | 0.95         | >80 | <10 |

| Model    | Wattage |
|----------|---------|
| EN-ALDDL | 12W     |
|          | 18W     |

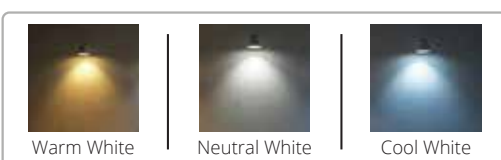

## Rimless Surface Light



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | 120 (lm/W)             | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model   | Wattage |
|---------|---------|
| EN-PCSL | 8W      |
|         | 15W     |
|         | 20W     |


## Tube Light



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | 120 (lm/W)             | Up-to 2.5KV      | 0.95         | >80 | <10 |


| Model   | Wattage |
|---------|---------|
| EN-TLT5 | 20W     |

## LED 1x1 PANEL LIGHT

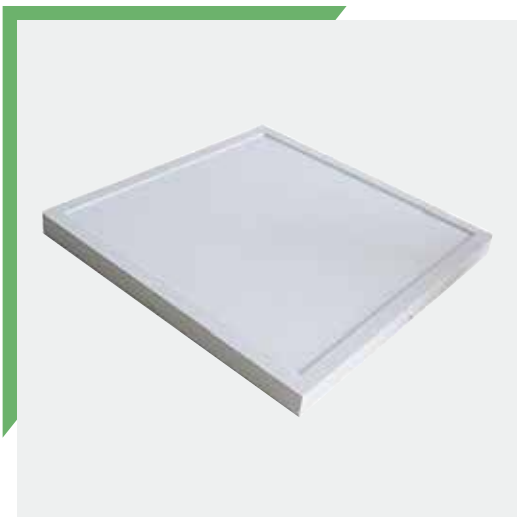

| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | 120 (lm/W)             | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model    | Wattage |
|----------|---------|
| EN-1X1PL | 30W     |

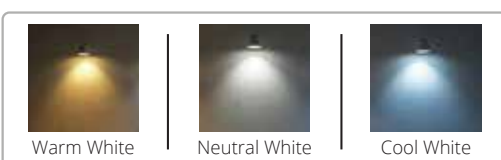

## LED 1x2 Panel Light



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | 120 (lm/W)             | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model    | Wattage |
|----------|---------|
| EN-1x2PL | 36W     |

## LED 1x4 Panel Light



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | 120 (lm/W)             | Up-to 2.5KV      | 0.95         | >80 | <10 |


| Model    | Wattage |
|----------|---------|
| EN-1X4PL | 36W     |
|          | 40W     |

## LED 2x2 Panel Light



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | 120 (lm/W)             | Up-to 2.5KV      | 0.95         | >80 | <10 |

| Model    | Wattage |
|----------|---------|
| EN-2X2PL | 36W     |
|          | 50W     |

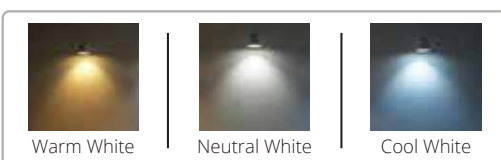

## Sensor TubeLight



| Specifications      |                     |
|---------------------|---------------------|
| <b>Fitting Type</b> | Surface Mount       |
| <b>Sensor Type</b>  | On-Off & Dimmable   |
| <b>Voltage</b>      | 220-240 V/AC   50Hz |
| <b>Wattage</b>      | 22W   36W           |
| <b>Lumens</b>       | 120 Lm/watt         |

## Panel light With Sensor




| Specifications      |                     |
|---------------------|---------------------|
| <b>Fitting Type</b> | Flush Mount         |
| <b>Sensor Type</b>  | On-Off & Dimmable   |
| <b>Voltage</b>      | 220-240 V/AC   50Hz |
| <b>Wattage</b>      | 12W   15W   18W     |
| <b>Lumens</b>       | 120 Lm/watt         |


## Surface light With Sensor




| Specifications      |                     |
|---------------------|---------------------|
| <b>Fitting Type</b> | Surface Mount       |
| <b>Sensor Type</b>  | On-Off & Dimmable   |
| <b>Voltage</b>      | 220-240 V/AC   50Hz |
| <b>Wattage</b>      | 12W   15W   18W     |
| <b>Lumens</b>       | 120 Lm/watt         |



Warm White



Neutral White



Cool White

## LED Inverter Bulb



| Input Voltage           | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD |
|-------------------------|------------------------|------------------|--------------|-----|-----|
| 220-240 V/AC    50/60Hz | 100 (lm/W)             | Up-to 2.5kV      | 0.95         | >80 | <10 |


| Model | Wattage |
|-------|---------|
| EN-IB | 12W     |

## LED Strip



| LED Strip-12V   | 120 LED        | 180 LED        | 240 LED        |
|-----------------|----------------|----------------|----------------|
| <b>LED Type</b> | SMD 2835       | SMD 2835       | SMD 2835       |
| <b>Wattage</b>  | 12W/m          | 18W/m          | 24W/m          |
| <b>LED QTY</b>  | 120 LED/ Meter | 180 LED/ Meter | 240 LED/ Meter |
| <b>IP Rated</b> | IP20           | IP20           | IP20           |
| <b>Packing</b>  | 5 Meters/Roll  | 5 Meters/Roll  | 5 Meters/Roll  |

## RGB Striplight

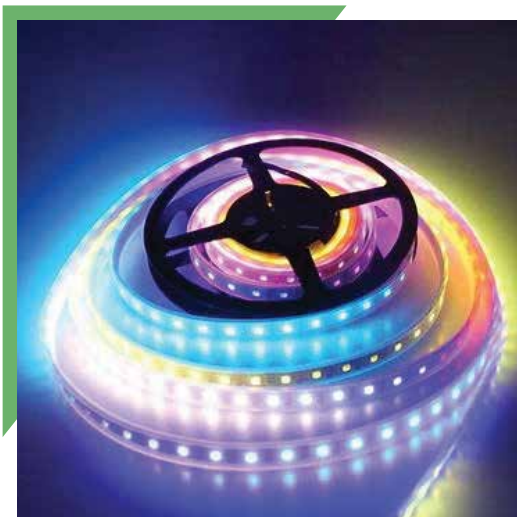


| Input Voltage | IP Rated | Packing       |
|---------------|----------|---------------|
| 24V           | IP20     | 5 Meters/Roll |

## LED Driver

| Driver Input        | Driver Output | Wattage |
|---------------------|---------------|---------|
| 140-265V/AC   50 Hz | 12V   5Amp    | 60W     |
|                     | 12V   10 Amp  | 120 W   |
|                     | 12V   16.5Amp | 200W    |
|                     | 12V   25Amp   | 300W    |
|                     | 12V   33.3Amp | 400W    |

## Aluminium Profiles

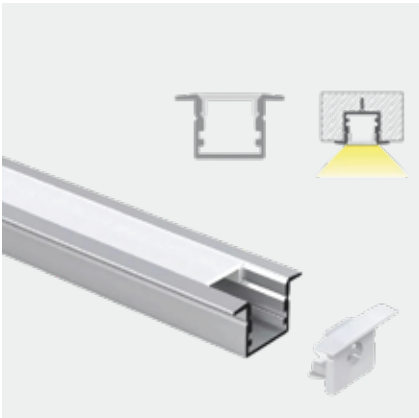

## Glass Model



| Input Voltage          | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD | IP Rating |
|------------------------|------------------------|------------------|--------------|-----|-----|-----------|
| 220-240V/AC    50/60Hz | 140 (lm/W)             | Up-to 6KV        | >0.98        | >80 | <10 | IP67      |

| Model   | Wattage          |
|---------|------------------|
| EN-GMSL | 24W              |
|         | 36W              |
|         | 50W              |
|         | 72W              |
|         | 100W (Eco Model) |
|         | 150W             |

## Lens Model



| Input Voltage          | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD | IP Rating |
|------------------------|------------------------|------------------|--------------|-----|-----|-----------|
| 220-240V/AC    50/60Hz | 140 (lm/W)             | Up-to 6KV        | >0.98        | >80 | <10 | IP67      |


| Model   | Wattage |
|---------|---------|
| EN-LMSL | 24W     |
|         | 36W     |
|         | 50W     |
|         | 72W     |
|         | 100W    |
|         | 150W    |

## Max Glow (High Power LED)




| Input Voltage          | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD | IP Rating |
|------------------------|------------------------|------------------|--------------|-----|-----|-----------|
| 220-240V/AC    50/60Hz | 210 (lm/W)             | Up-to 6KV        | >0.98        | >80 | <10 | IP67      |


| Model   | Wattage |
|---------|---------|
| EN-MGSL | 50W     |
|         | 100W    |
|         | 150W    |
|         | 200W    |



Warm White




Neutral White



Cool White

## Eternal

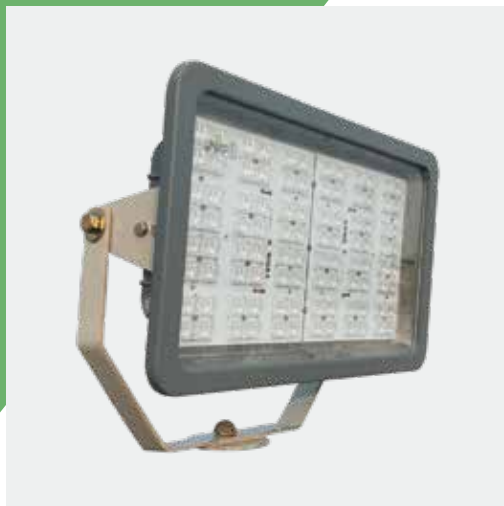

| Input Voltage          | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD | IP Rating |
|------------------------|------------------------|------------------|--------------|-----|-----|-----------|
| 220-240V/AC    50/60Hz | 140 (lm/W)             | Up-to 6kV        | >0.98        | >80 | <10 | IP67      |

| Model   | Wattage |
|---------|---------|
| EN-BCFL | 30W     |
|         | 50W     |
|         | 100W    |
|         | 150W    |
|         | 200W    |


## luxxon



| Input Voltage          | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD | IP Rating |
|------------------------|------------------------|------------------|--------------|-----|-----|-----------|
| 220-240V/AC    50/60Hz | 140 (lm/W)             | Up-to 6kV        | >0.98        | >80 | <10 | IP67      |


| Model   | Wattage |
|---------|---------|
| EN-LXFL | 50W     |
|         | 100W    |
|         | 150W    |
|         | 200W    |
|         | 300W    |

## MaxGlow (High Power LED)

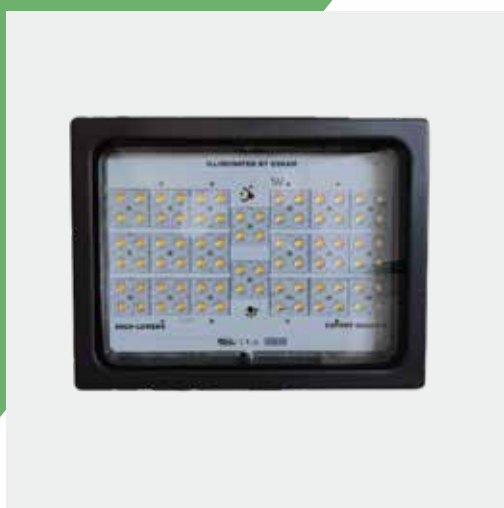


| Input Voltage          | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD | IP Rating |
|------------------------|------------------------|------------------|--------------|-----|-----|-----------|
| 220-240V/AC    50/60Hz | 210 (lm/W)             | Up-to 6kV        | >0.98        | >80 | <10 | IP67      |


| Model   | Wattage |
|---------|---------|
| EN-MGFL | 50W     |
|         | 150W    |
|         | 200W    |
|         | 250W    |
|         | 300W    |
|         | 400W    |
|         | 500W    |



Warm White




Neutral White



Cool White

## Optima

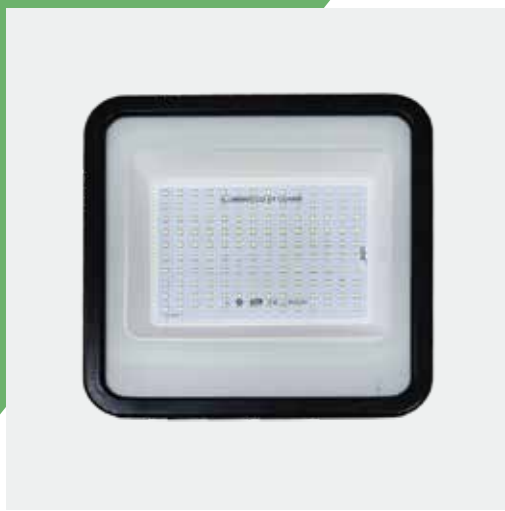

| Input Voltage          | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD | IP Rating |
|------------------------|------------------------|------------------|--------------|-----|-----|-----------|
| 220-240V/AC    50/60Hz | 140 (lm/W)             | Up-to 6kV        | >0.98        | >80 | <10 | IP67      |


| Model   | Wattage |
|---------|---------|
| EN-OPFL | 30W     |
|         | 50W     |
|         | 100W    |
|         | 150W    |
|         | 200W    |

## Lens Elite




| Input Voltage          | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD | IP Rating |
|------------------------|------------------------|------------------|--------------|-----|-----|-----------|
| 220-240V/AC    50/60Hz | 140 (lm/W)             | Up-to 6kV        | >0.98        | >80 | <10 | IP67      |


| Model   | Wattage |
|---------|---------|
| EN-LEFL | 50W     |
|         | 100W    |
|         | 150W    |
|         | 200W    |



Warm White




Neutral White



Cool White


## Premia Model

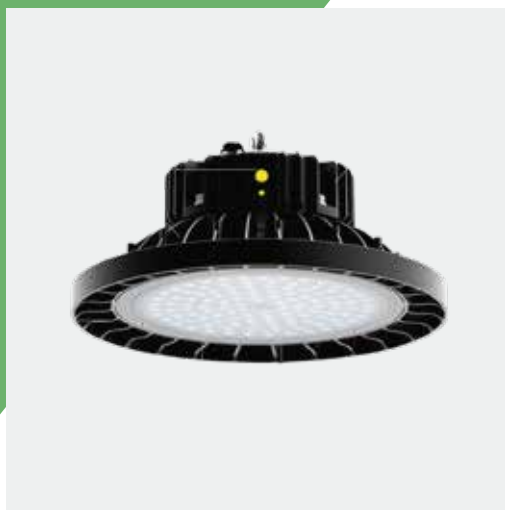

| Input Voltage          | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD | IP Rating |
|------------------------|------------------------|------------------|--------------|-----|-----|-----------|
| 220-240V/AC    50/60Hz | 140 (lm/W)             | Up-to 6kV        | >0.98        | >80 | <10 | IP67      |

| Model   | Wattage |
|---------|---------|
| EN-PMHB | 50W     |
|         | 100W    |
|         | 150W    |
|         | 200W    |

## Premia Pro Model

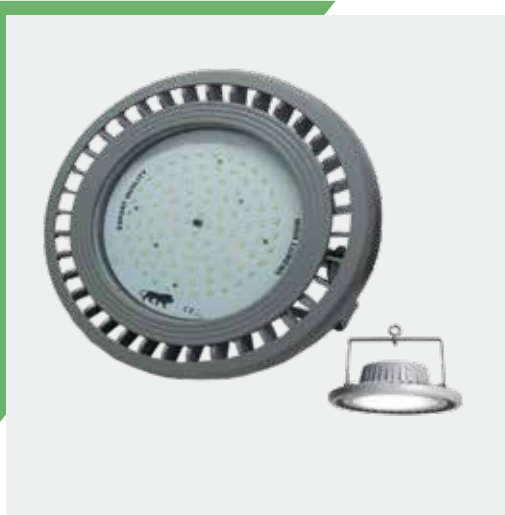

| Input Voltage          | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD | IP Rating |
|------------------------|------------------------|------------------|--------------|-----|-----|-----------|
| 220-240V/AC    50/60Hz | 140 (lm/W)             | Up-to 6kV        | >0.98        | >80 | <10 | IP67      |


| Model   | Wattage |
|---------|---------|
| EN-PPHB | 100W    |
|         | 150W    |
|         | 200W    |

## Well Glass



| Input Voltage          | Lumens Efficacy of LED | Surge Protection | Power Factor | CRI | THD | IP Rating |
|------------------------|------------------------|------------------|--------------|-----|-----|-----------|
| 220-240V/AC    50/60Hz | 140 (lm/W)             | Up-to 6kV        | >0.98        | >80 | <10 | IP67      |

| Model | Wattage |
|-------|---------|
| EN-WG | 30W     |
|       | 40W     |
|       | 50W     |
|       | 72W     |

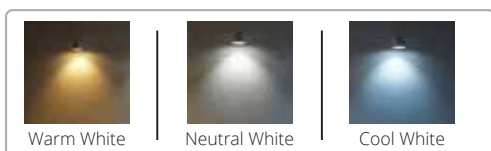

# enRAY<sup>®</sup>

NEXT WAVE OF INNOVATION



+91 96427 02233

 [www.enray.in](http://www.enray.in)

 [info@enray.in](mailto:info@enray.in)

 #169,201, 2nd Floor Ganga Plaza, Old Vasavi Nagar, Karkhana, Sec-bad,  
Hyderabad, Telangana, India - 500015.

 94296 91446